

## Properties Affected by Glass Fiber Content. (No.2 Thermal Property & Others)

### 3. Thermal Property

DTUL (Distortion Temperature Under Load) is also improved extremely by a glass fiber reinforcement. The relation between DTUL and glass fiber content under the fiber stress 1.82MPa is shown in Fig.1.

### 4. Thermal expansion and mold shrinkage

Thermal expansion, mold shrinkage and dimensional stability that is very important properties for engineering polymers are also improved by glass fiber reinforcement. Especially thermal expansion is affected by glass transition temperature: T<sub>g</sub> of a resin. In Figs.2 and 3, the relation between thermal expansion and glass content are shown for mold direction (MD) and transverse direction (TD).

Mold shrinkage affected by glass content is shown in Fig.4, in this data the measurement of shrinkage has been using disc molding with diameter 50mm, thickness 2mm and one side gating.

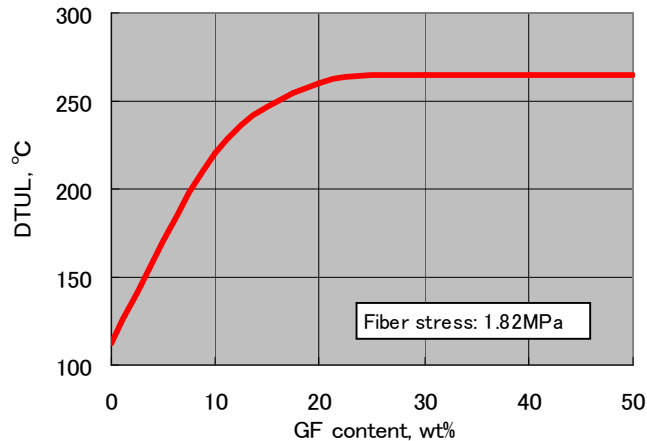


Fig.1 DTUL vs. GF content

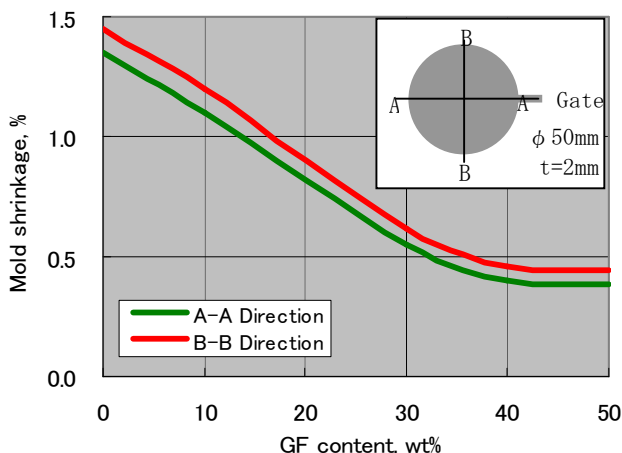


Fig.4 Mold shrinkage vs. GF content.

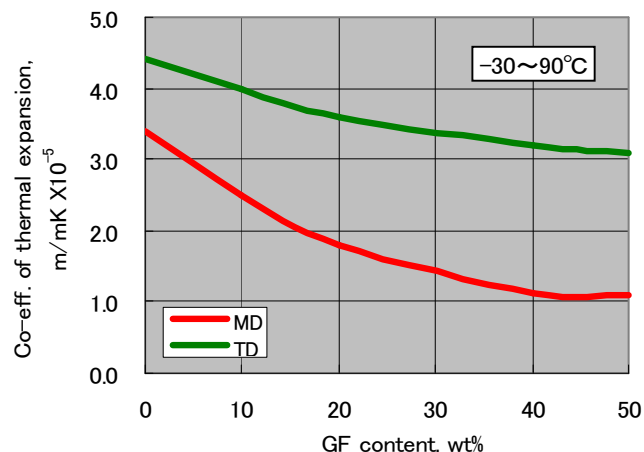


Fig.2 Thermal expansion vs. GF content.

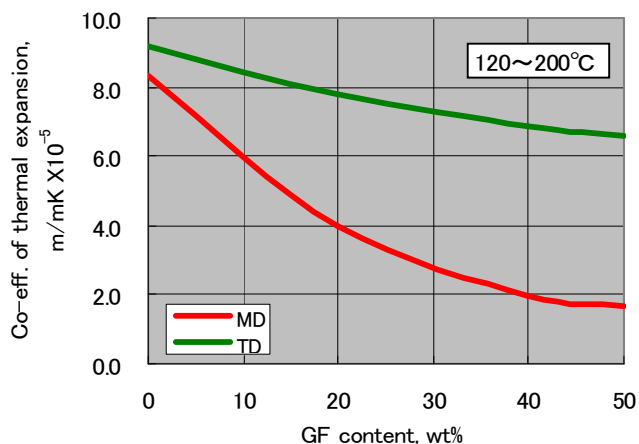


Fig.3 Thermal expansion vs. GF content



★Please refer to Material Safety Data Sheet for safety precautions prior to use. The information contained in this data sheet is based on tests or research DIC Corporation ('DIC') believes to be reliable, but no warranty is given by DIC concerning the accuracy or completeness thereof. The supply of the information does not release the recipient from the obligation to test the products as to their suitability for the intended applications and processes. DIC has no liability for any consequence of the application, processing or use of the information or the products. Information concerning the application of the products is not and should not be construed as a warranty as to non-infringement of intellectual property for a particular application.